

**TOORX**  
PROFESSIONAL LINE

# INSTRUCTION



# WBX2200




Cod : GRLDTOORXWBX2200

Rev : 00

Ed : 06/18

## Training Area and Free Area

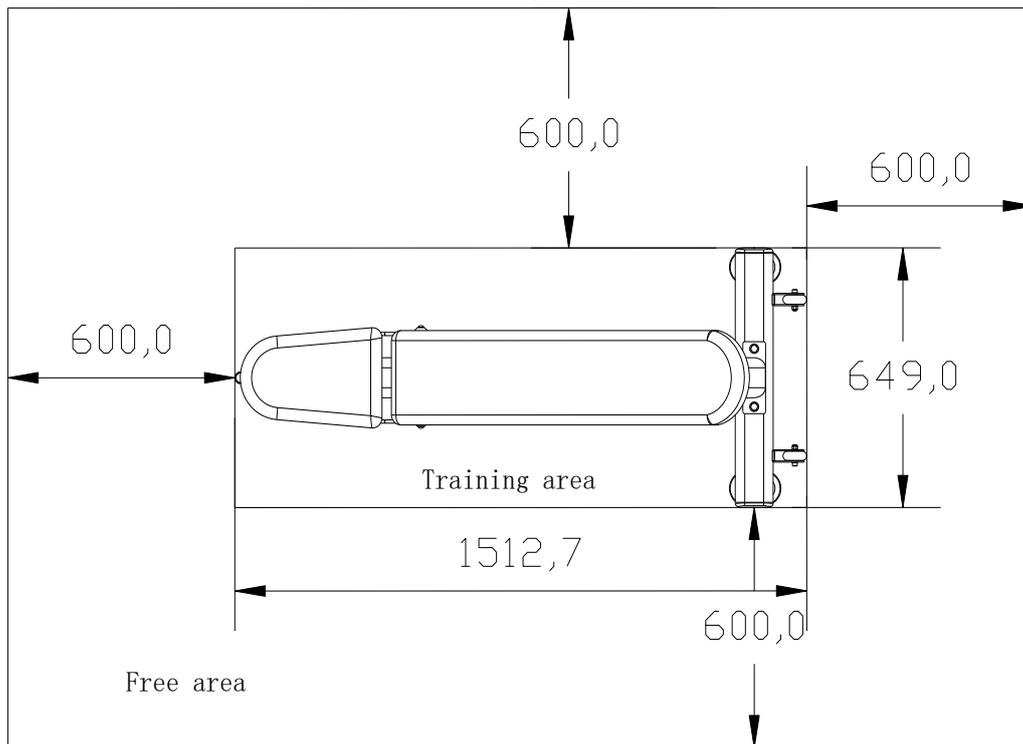

## Specifications

Class: S

Maximum Wt. Capacity: 135kg/297IBS

Maximum User Weight: 135kg/297IBS

Product Total Surface: 1512.7\*649mm

Product Total Mass: 55kg/121IBS

## REGULAR MAINTENANCE

1. The safety level of the equipment can be maintained only if it is examined regularly for damage and wear, e.g. ropes, pulleys, connection points;
2. Pay special attention to components most susceptible to wear.
3. Replace defective components immediately and /or keep the equipment out of use until repair;

MAINTENANCE	EVERYDAY	EVERY WEEK	THREE MONTHS
Check: connecting, bolt, Weight stack bolt	√		
Clearance: cushion and cover	√		
Lubrication: place of sliding			√
Check: bolt if tighten		√	
Lubrication: Bracket of bearing			√

4. This equipment should carry on regular maintenance according to the following chart:

## INSTALL SKETCH MAP

Let assembly become easier

All the content of user's manual is to assured the strength training machine can be installed more easily

Reading the details and instructions before installing:


1. Because the size and weight of equipment is so large, Please choose the installed place near the desired station and assured there is enough space to exercise
2. All parts can be put on the clear area, then backout the wrapper. And the wrapper can't be through away before installation finished.

3. Screw the bolt tightly except the additional instruction
4. All parts must be installed according the illustration indication.
5. Installation work can be finished by tow men
6. Identify all parts by part identify chart


## Assembly Step:

### Use tool:

1. M6 Hex spanner
2. Two 17-19 spanner

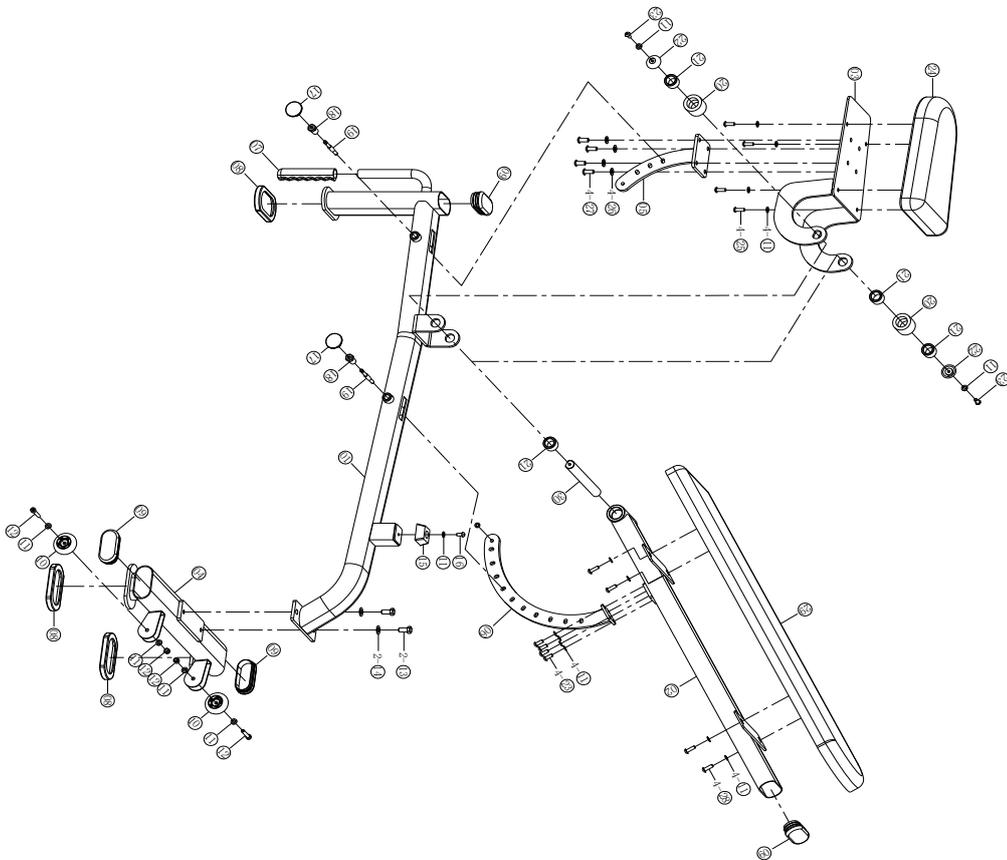


# Step. 1

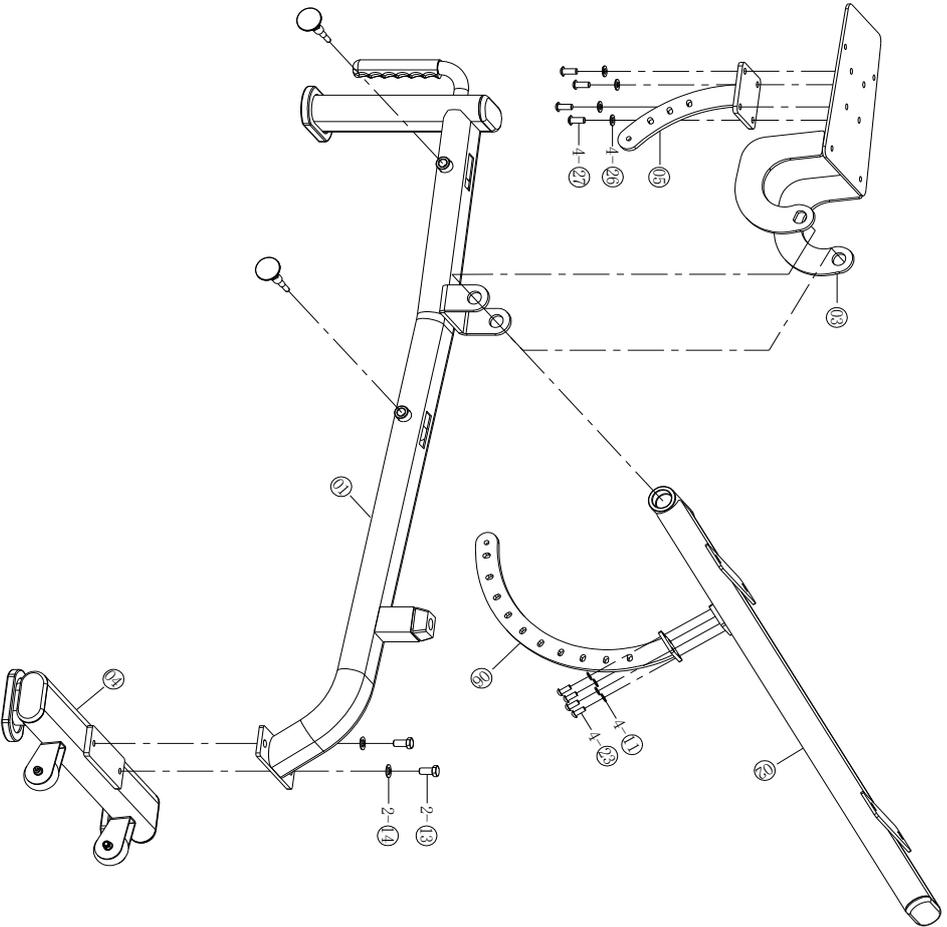

NO.	Name	Specification	Qty
01	Main Frame		1
02	back plate assembly		1
03	seat frame assembly		1
04	ground tube assembly		1
05	seat frame adjustable assembly		1
06	back plate adjustable assembly		1
11	washer	M8	4
23	semicircle head screws hexagon	M8*20L	4
13	hexagon bolt	M12*25L	2
14	washer	M12	2
26	washer	M10	4
27	semicircle head screws hexagon	M10*25L	4

# Step. 2

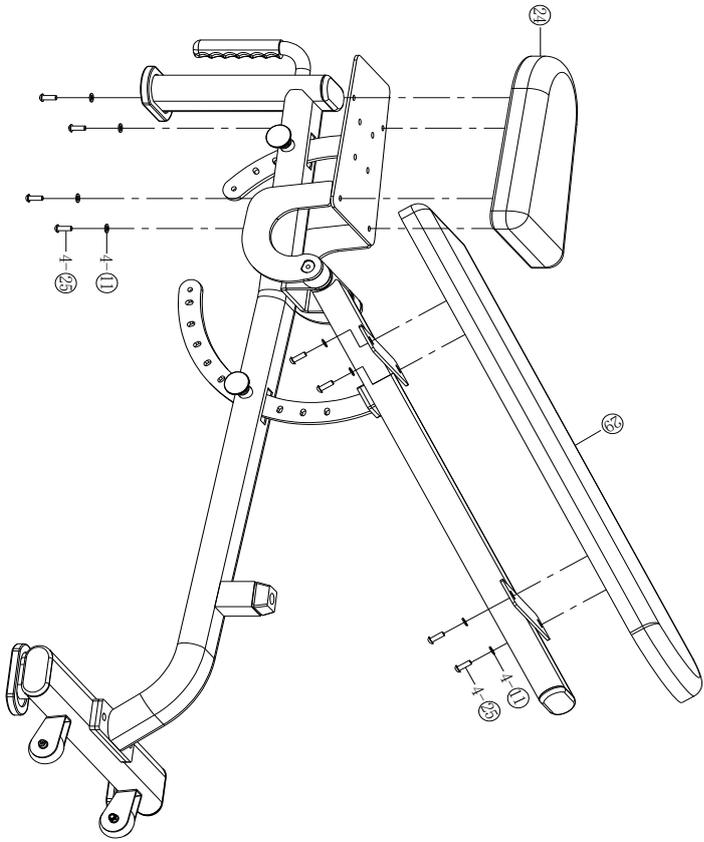


NO.	Name	Specification	Qty
24	seat cushion		1
29	back cushion		1
11	washer	M8	8
25	semi circle head screws hexagon	M8*25L	8

## Adjust Instructions

### Seat and Back Height Adjustment

- 1、 Pull out the adjustable handle,adjust seat and back cushion to suitable position,and loosen the handle.
- 2、 After finish adjusting,please ensure that the bolt of the adjustable handle is inserted to pin hole completely before using the equipment.

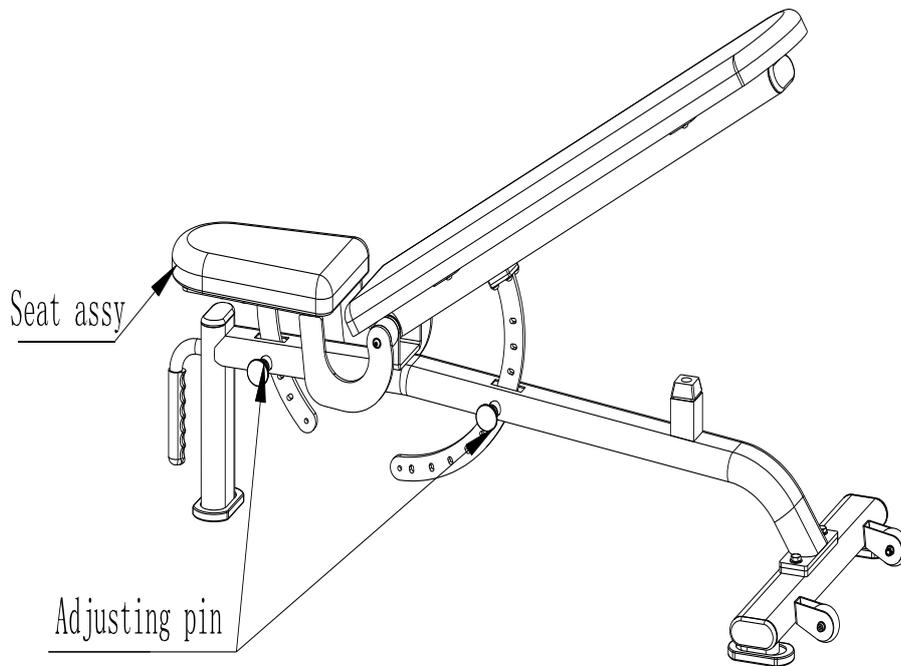



GARLANDO SPA  
Via Regione Piemonte, 32 - Zona Industriale D1  
15068 - Pozzolo Formigaro (AL) - Italy  
[www.toorx.it](http://www.toorx.it) - [info@toorx.it](mailto:info@toorx.it)